

## PW476

### Circular Chart Recorder

#### FEATURES

- 0-300 PSI
- 7-Day or 24-Hour recording
- 1/4" NPT fitting
- Compact and durable design
- Single AA battery operation



#### ABOUT

Our 4-inch (101mm) line of recorders produce a permanent visual record of your variable pressure data. These recorders provide a complete written history at the source.



For more information, please refer to

**T:** +31 (0)174 287 160


**E:** [info@vrsupplies.com](mailto:info@vrsupplies.com)

**W:** [www.vrsupplies.com](http://www.vrsupplies.com)

**Circular Chart Recorder**

**Specifications**

- **Ambient Operating RH Conditions:** 0-95% RH non-condensing
- **Ambient Operating Temperature Conditions:** -22 to 122F (-30 to 50C)
- **Battery Life (Avg):** 1 Year
- **Calibration Options:** N100, N300
- **Channels: CH1:** Pressure
- **Chart Rotation Speed:** 7 Day or 24 Hour Switchable
- **Dimensions:** 6.25 x 6 x 2.9in
- **Enclosure:** Velox PBT NEMA 4X with Polycarbonate Door Window  
(Weather/Water Resistant)
- **Fitting:** 1/4" NPT Thread, 5/8" Hex
- **IP Rating:** 66
- **Included Accessories:** One AA Battery, Red Pen and Quick Start Guide.  
\*Charts sold separately.
- **Mounting Options:** Stem or Wall Mount (With Keyhole)
- **Power Source:** Battery; One AA Battery (User Replaceable)
- **Pressure Accuracy:** 2% of Full Scale
- **Pressure Range:** 0 to 300PSI
- **Response Time:** 1 Second
- **Unit Weight:** 1.8 lbs
- **Units/Pkg:** 1
- **Warranty:** 12-Month Limited

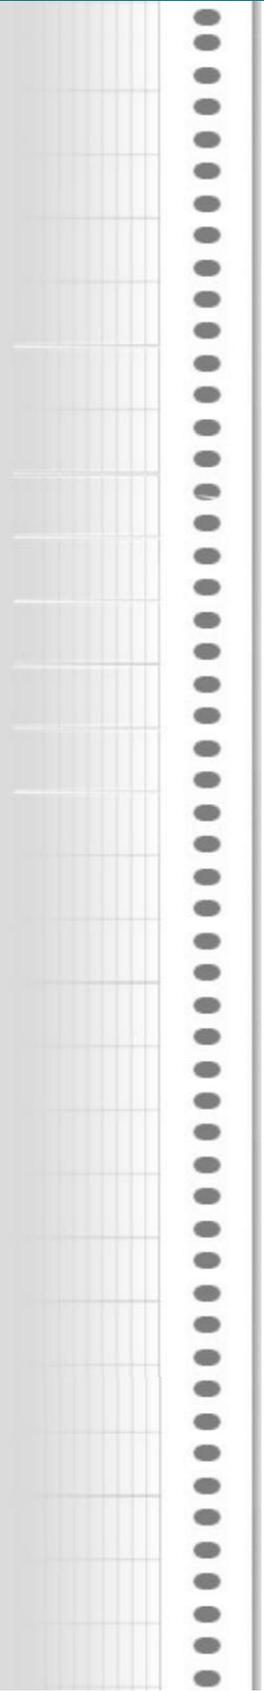

**Circular Chart Recorder**

**Accessories**



A791 – Pressure Kit  
Pressure Fitting Accessory Kit



A792 – Pressure Pigtail  
Steam Pressure Pigtail



A793 – Hydrant Kit  
Fire Hydrant Adapter Kit



R006 – AA Battery



R022 – Pressure Filter Kit  
Filtre Kit includes Snubber

